


Star Lake Woods (SLW) Road Project Proposals:

6 Jul 2022

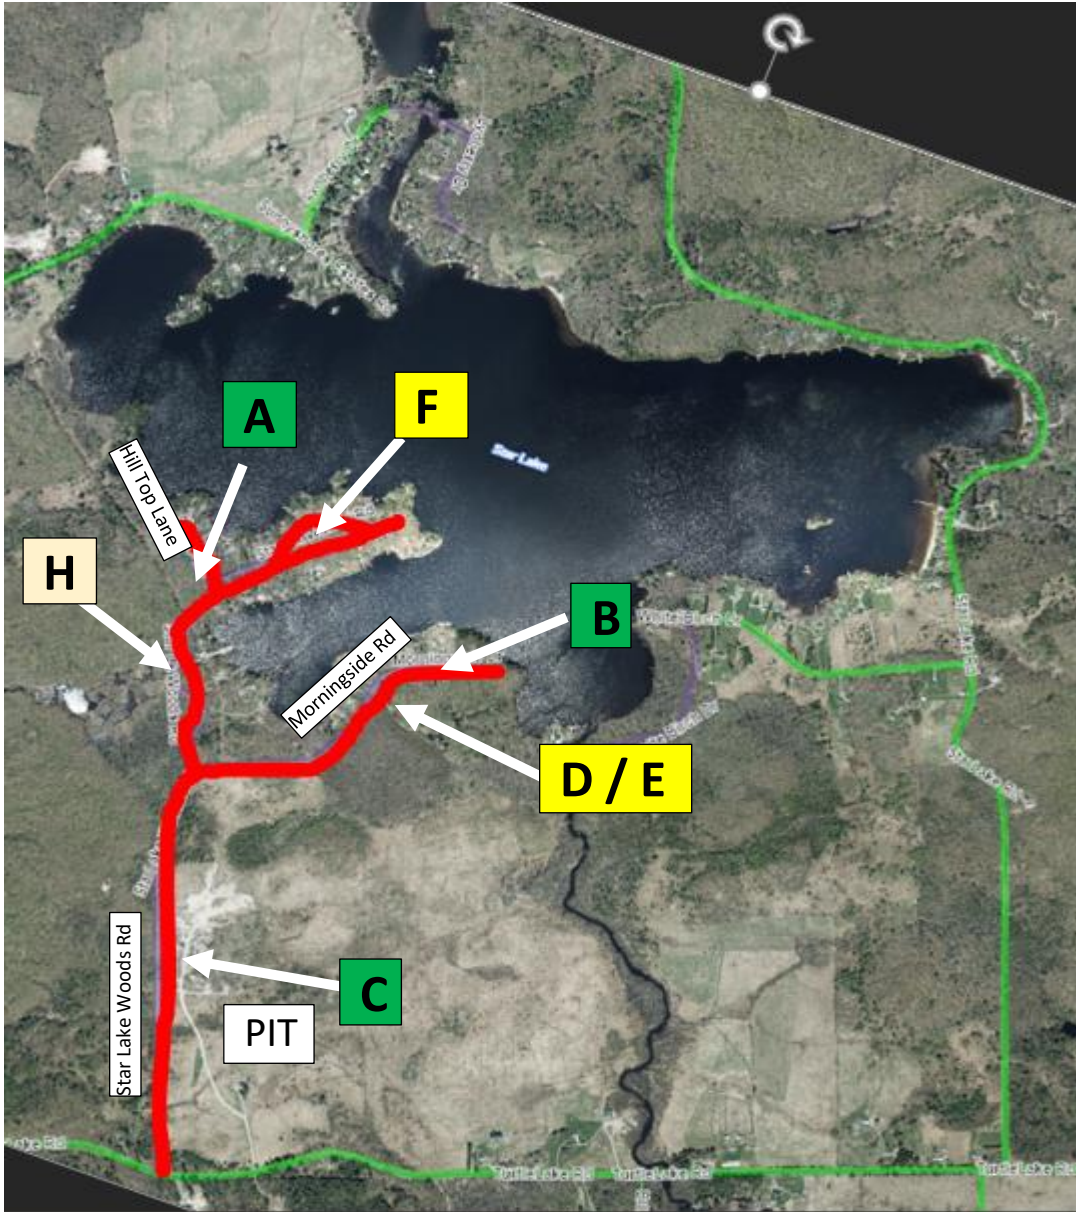

Road Projects - Culverts, Grade, & Gravel

2022 Projects

		SLW / Hilltop	Morningside	Main Rd	Status
A	Hilltop Top Lane - Gravel	\$1,062.20			Complete
B	Morningside (Upr) Culvert Replace		\$694.95		Complete
C	Grading			\$203.40	Complete
D	Morningside (Lwr) Culvert Replace		\$4,000.00		Pending
E	Morningside Hill Excavation		\$1,500.00		Pending
F	SLW Loop Gravel / Drain Rock	\$5,100.00			Pending
		\$6,162.20	\$6,194.95	\$203.40	
					\$12,560.55 Sub Total

Project 'D / E':



Project D / E' Description: *Morningside Lower Culvert & Hill*

D 1 - Replace 24" pipe with 2 – 15" diameter pipes

D 2 - 30 ft parallel pipes installed at lower grade to improve drainage and to increase road surface above piping

E – Heaving rock removal and gravel application on Morningside hill

Estimated timing 1-2 days

Cost: Budget \$5500

- Piping = \$2500 (Qty 3 - \$715 / pipe)
- Culvert Excavation / Material = \$1500
- Hill Excavation / Material = \$1500

Project 'F':



Project 'F' Description: *Star Lake Loop Gravel & Excavation*

F 1 – Remove spring mud issue at loop start and backfill with large 4" drainage stone

F 2 – Apply 12 loads of gravel around SLW Loop

Cost: Budget \$5100

- Gravel = \$5100 (12 x \$425/ load)